




COWBOY LOG HOMES



SIERRA PLAN

Email: mike@cowboyloghomes.com


Phone: (406)388-3458

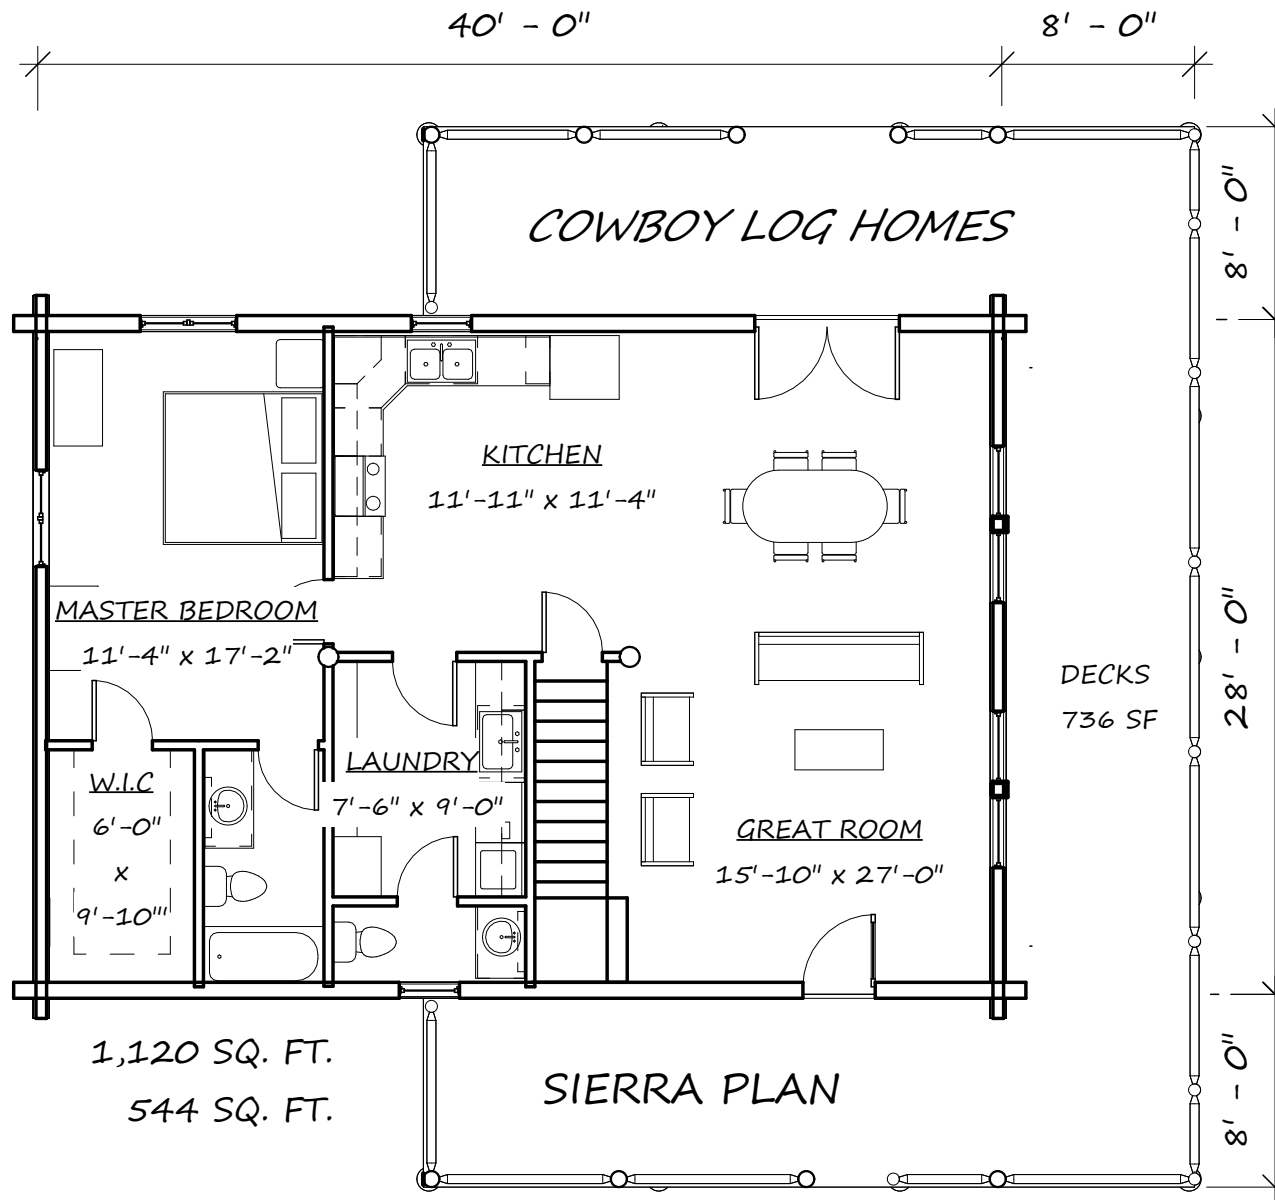


FIRST FLOOR	1,120 SQ. FT.
SECOND FLOOR	544 SQ. FT.
TOTAL LIVING AREA	1,664 SQ. FT.
DECKS	736 SQ. FT.



SIERRA PLAN

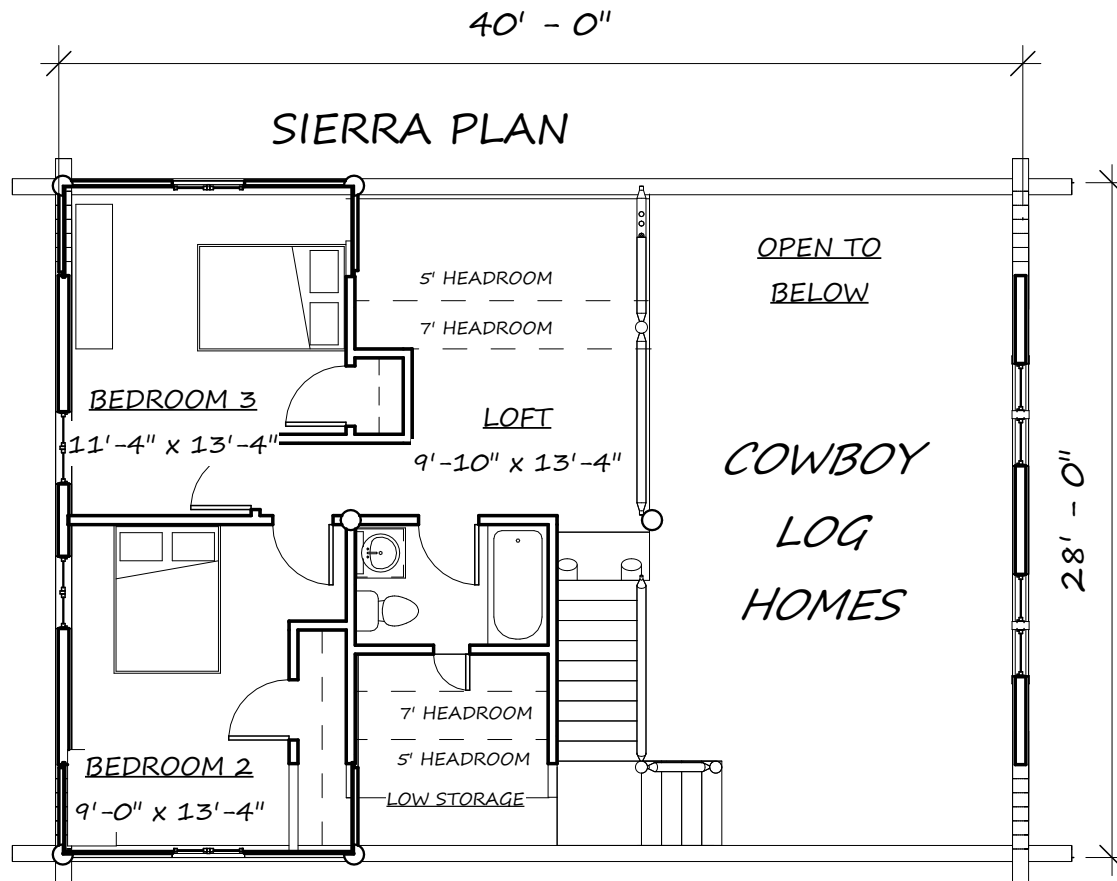


SIERRA PLAN

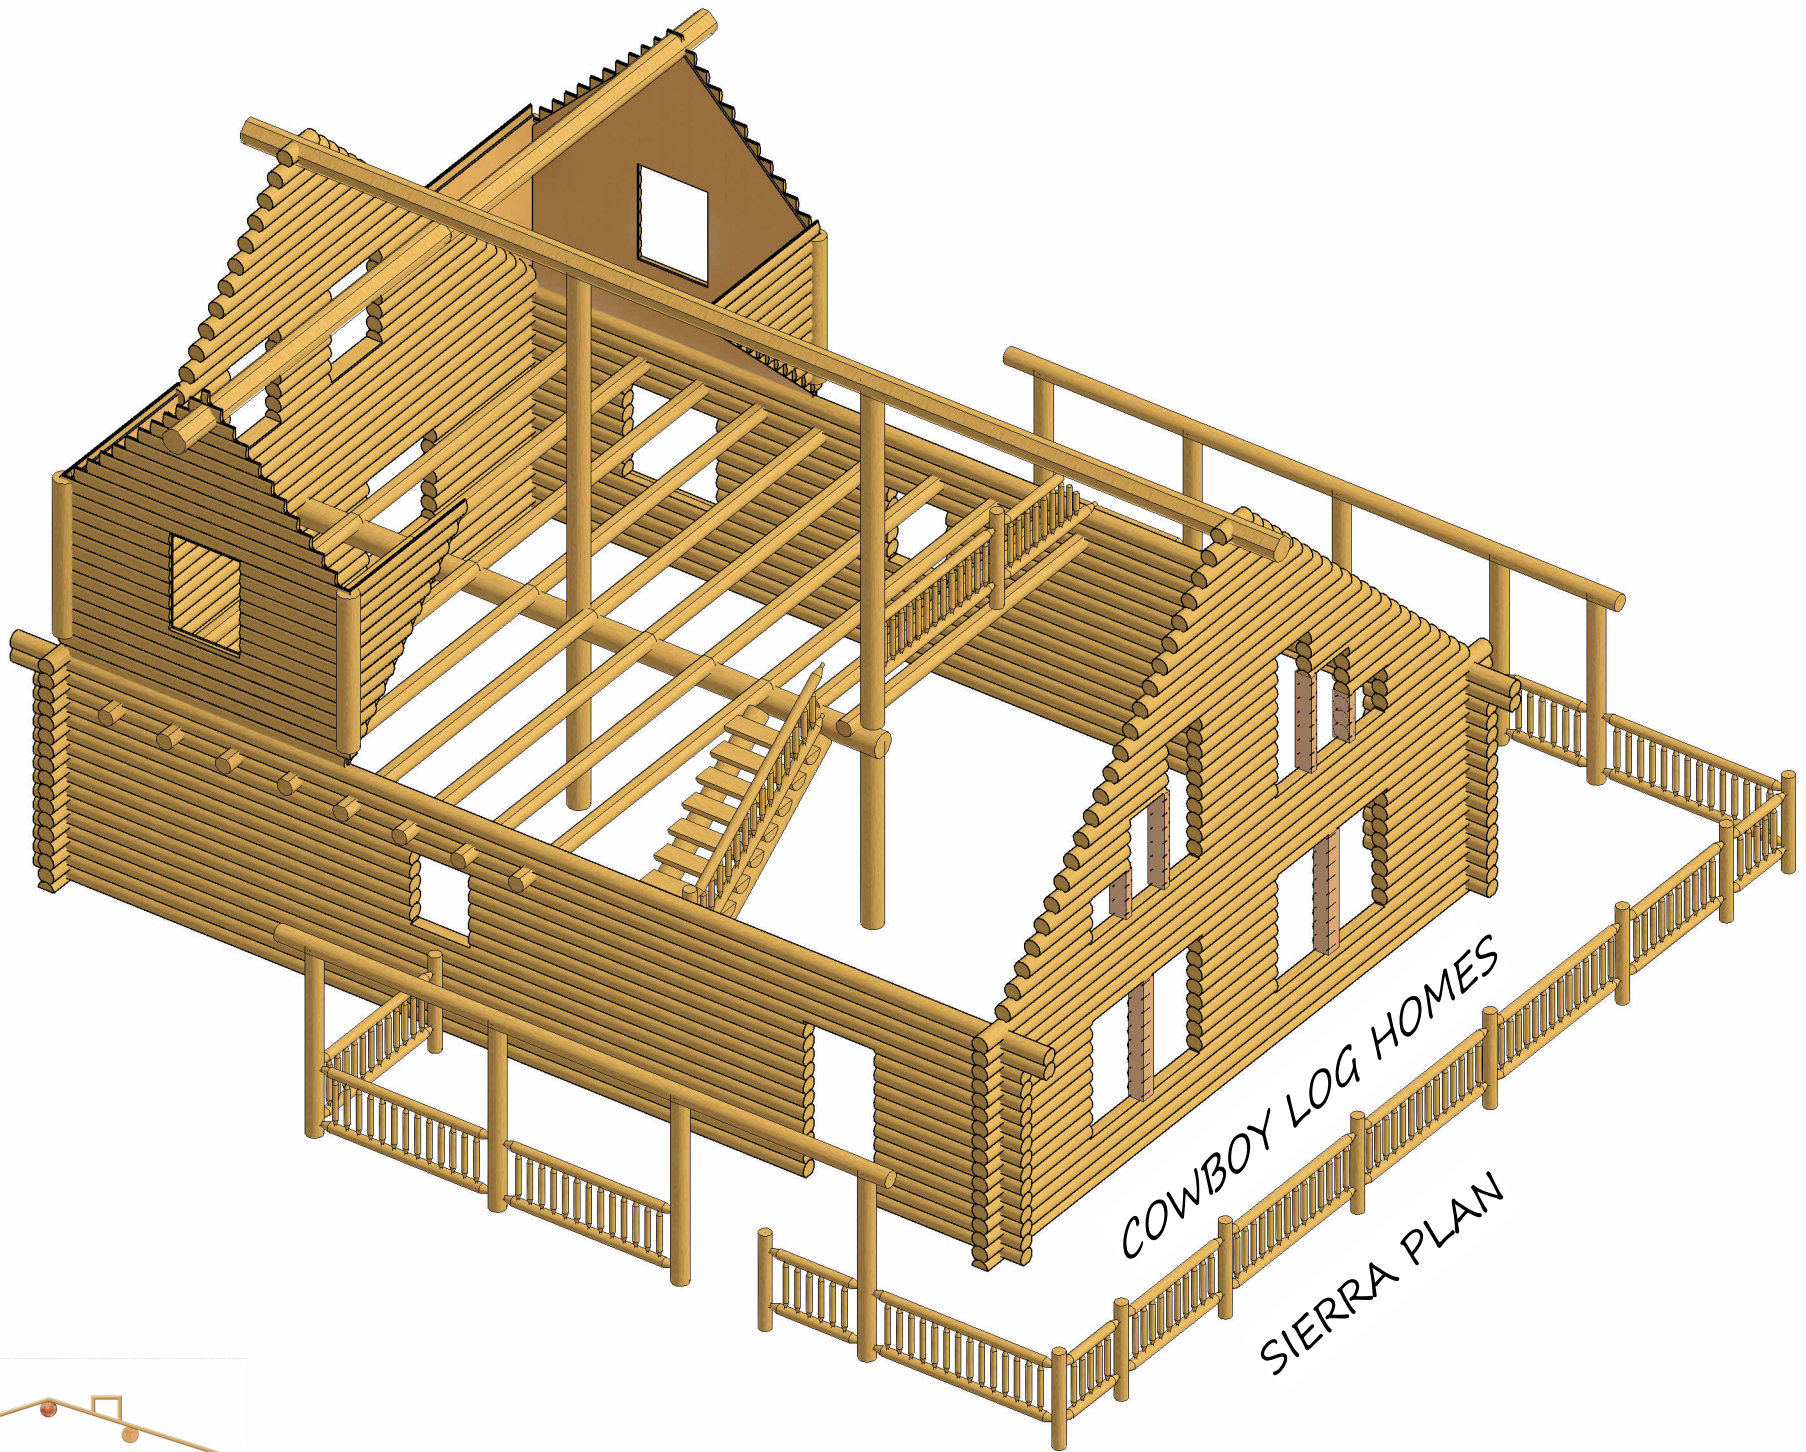

SIERRA PLAN

SWEDISH COPE LOG SHELL PACKAGE

ALL WINDOW SILL LOGS, ALL DOOR & WINDOW HEADER LOGS, GABLE ENDS, LOG POSTS, ELECTRICAL OPENINGS, INTERIOR WALL LOCATIONS REQUIRE FIELD CUTTING

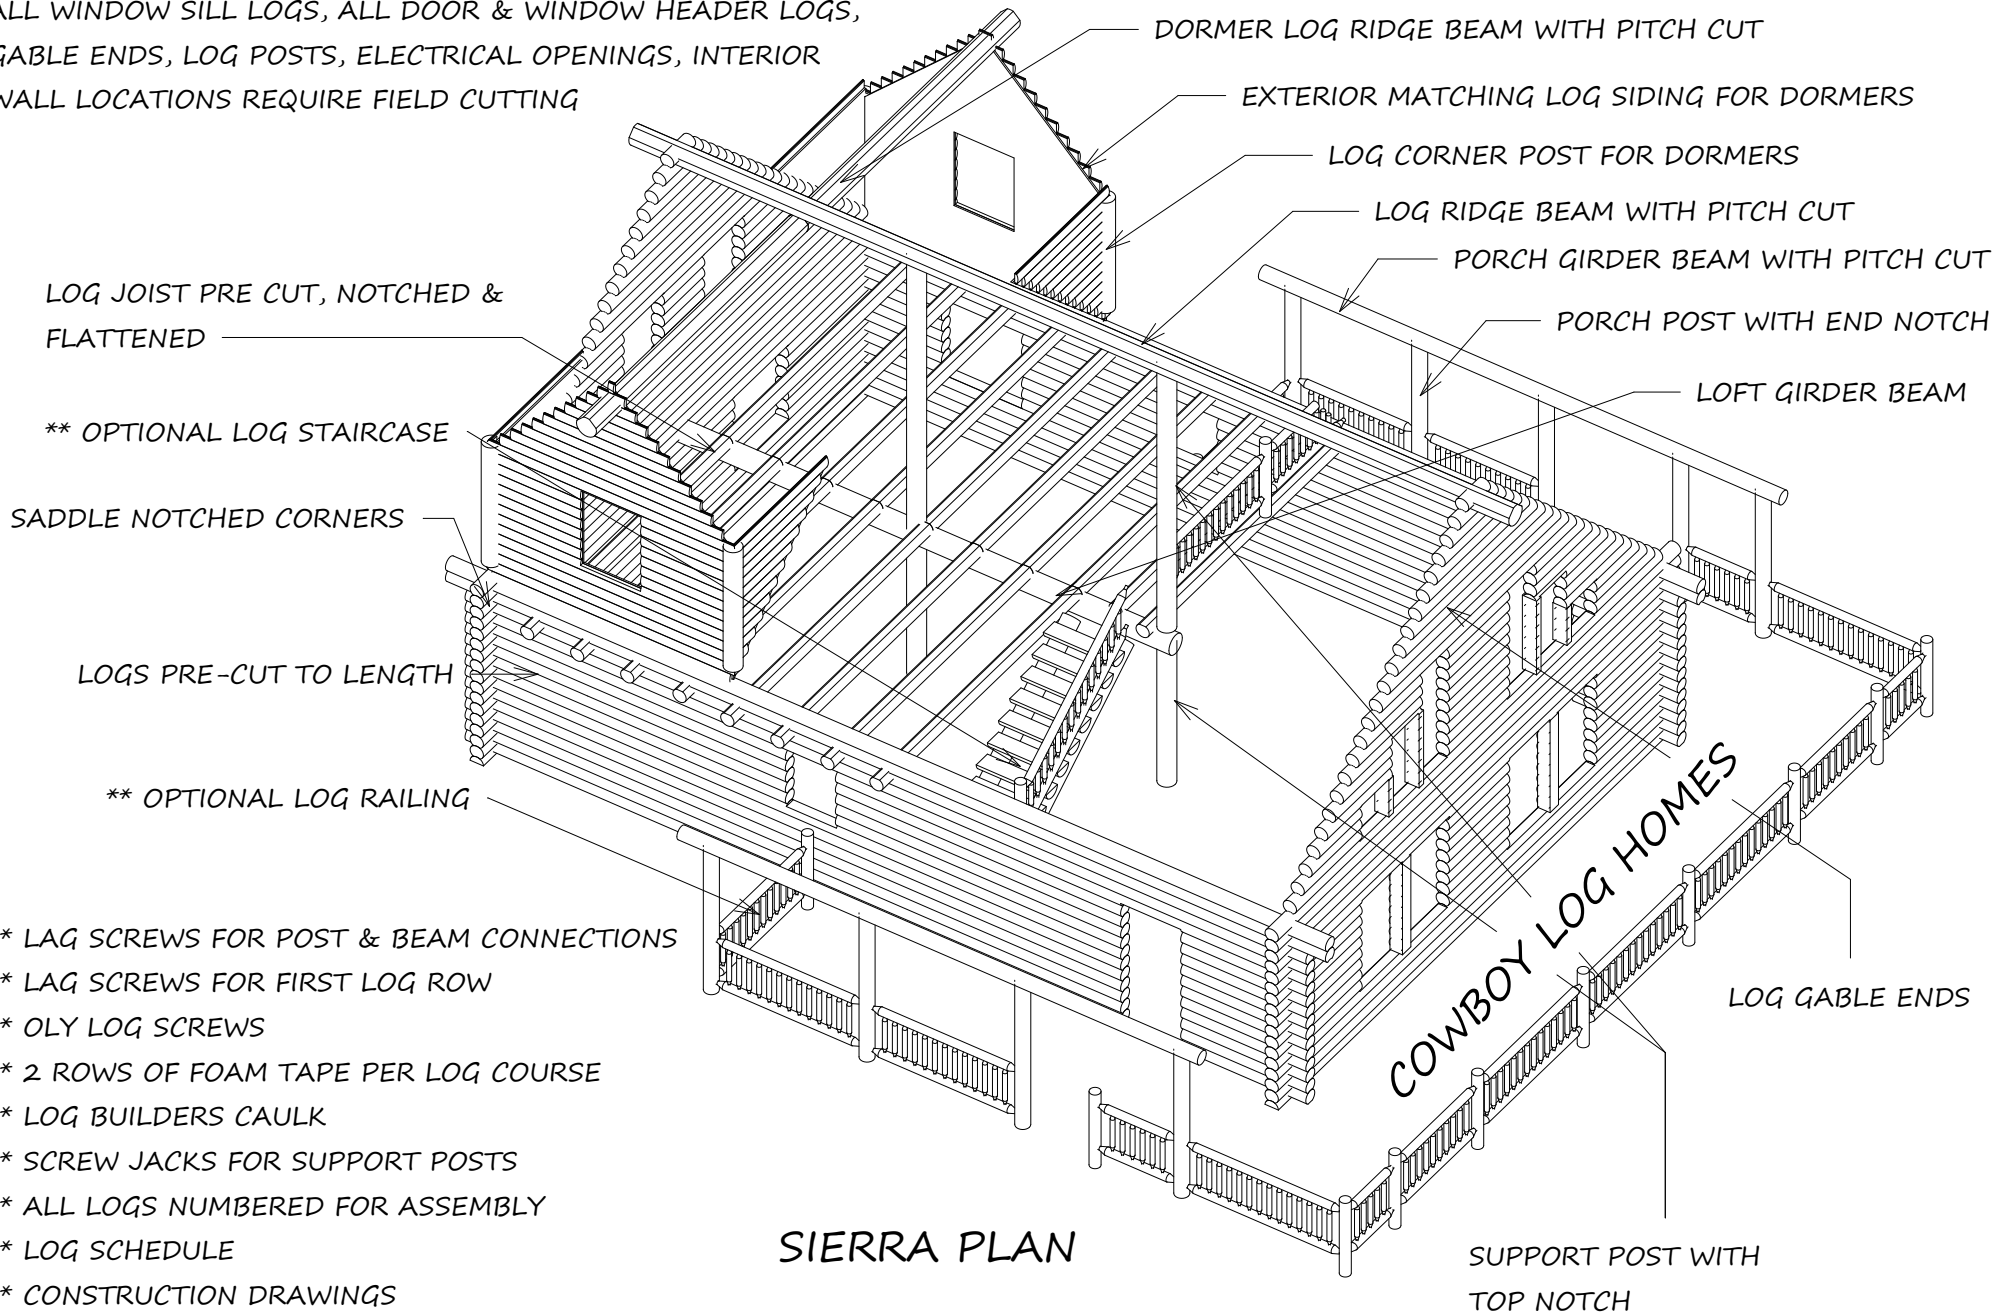

SIERRA PLAN

LOG JOIST PRE CUT, NOTCHED & FLATTENED

** OPTIONAL LOG STAIRCASE

SADDLE NOTCHED CORNERS

LOGS PRE-CUT TO LENGTH

** OPTIONAL LOG RAILING

- * LAG SCREWS FOR POST & BEAM CONNECTIONS
- * LAG SCREWS FOR FIRST LOG ROW
- * OLY LOG SCREWS
- * 2 ROWS OF FOAM TAPE PER LOG COURSE
- * LOG BUILDERS CAULK
- * SCREW JACKS FOR SUPPORT POSTS
- * ALL LOGS NUMBERED FOR ASSEMBLY
- * LOG SCHEDULE
- * CONSTRUCTION DRAWINGS
- * DELIVERY TO JOB SITE 1,000 MILES F.O.B. FROM BELGRADE, MT.

COWBOY LOG HOMES

SUPPORT POST WITH TOP NOTCH

DRY IN MATERIALS

FIRST FLOOR SUB-FLOOR

2" X 8" TREATED SILL PLATE

(3) 1-3/4" X 11-7/8" GIRDER BEAM

(2) 1-3/4" X 11-7/8" RIM BOARD

11-7/8" TJI FLOOR JOISTS

2" X 4" BLOCKING

3/4" X 4' X 8' OSB T&G SUB-FLOOR

SECOND FLOOR SUB-FLOOR

2" X 8" RIM BOARD

2" X 8" FLOOR JOISTS

3/4" X 4' X 8' OSB T&G SUB-FLOOR

FRAMING[†]

2" X 6" DOOR AND WINDOW BUCKS

2" X 4" AND 2" X 6" INTERIOR WALL

11-7/8" TJI ROOF RAFTERS

1-3/4" X 11-7/8" LVL SUPPORT RAFTERS

1-3/4" X 11-7/8" LVL GABLE SUB-FASCIA

1-1/4" X 11-7/8" LSL BLOCKING & SUB-

2X RAFTERS FOR PORCH ROOF

1/2" X 4' X 8' CDX ROOF SHEETING

TITANIUM ROOF UNDERLAYMENT

2X TREATED DECK FRAMING

2X OR 5/4 DECKING

EXTERIOR TRIM

1" X 4" PINE DOOR AND WINDOW TRIM

1" X 6" PINE DOOR AND WINDOW HEADER

1" X 12" PINE FASCIA BOARD


1" X 6" PINE RAKE BOARD

1" X 8" PINE FASCIA BOARD FOR PORCH

ROOF⁶ PINE T&G SOFFIT

EXTERIOR DOOR ALLOWANCE

WINDOW ALLOWANCE

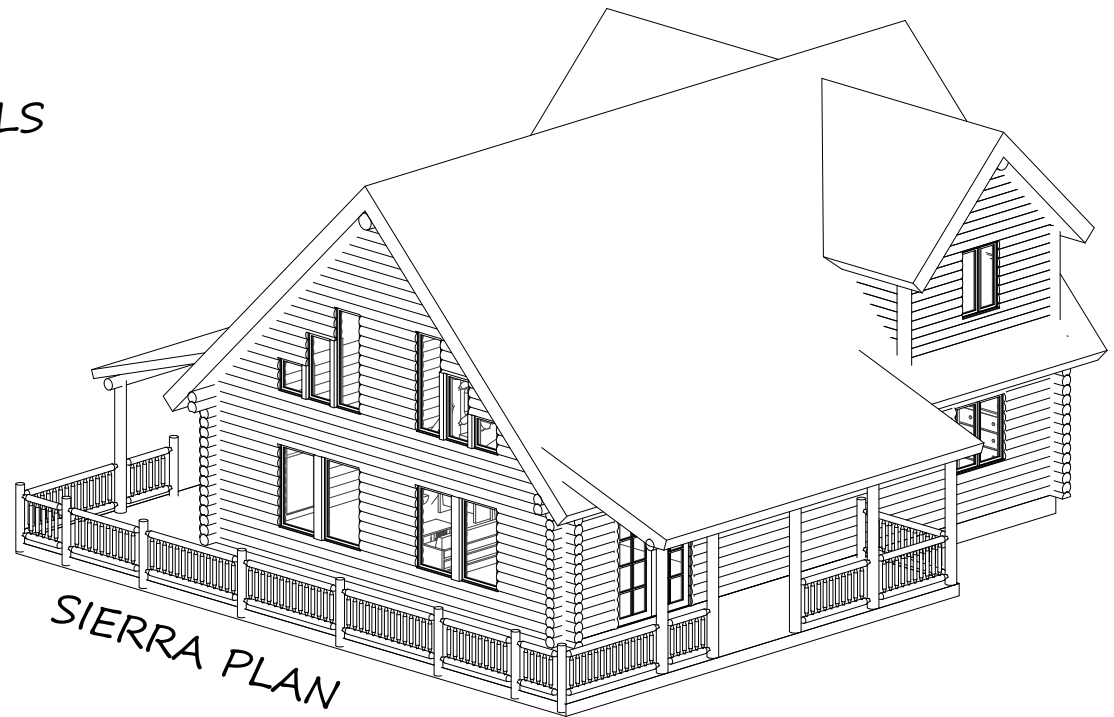

FRAMING FOR DORMERS

2" X 6" FRAMING EXTERIOR WALLS

LVL HEADERS OVER WINDOWS

7/16" X 4' X 8' OSB SHEETING

HOUSE WRAP

WINDOW WRAP

* ITEMS NOT INCLUDED- NAILS, SCREWS, JOIST HANGERS,

BRACKETS, LIQUID NAIL, CAULKING, TREATED POSTS,

FOUNDATION MATERIALS, OR FINISHED ROOFING



SIERRA PLAN